

MGate™ 5102-PBM-PN Series

1-port PROFIBUS-to-PROFINET gateways



- > Protocol conversion between PROFIBUS and PROFINET
- > Automatic scan of PROFIBUS devices, and easy configuration
- > microSD card for configuration backup
- > Built-in Ethernet cascading for easy wiring
- > Redundant dual DC power inputs and relay output supported
- > Embedded I/O monitoring and diagnostic tools
- > Web-based GUI for I/O data visualization
- > -40 to 75°C wide operating temperature models available




Overview

The MGate 5102-PBM-PN gateway provides a communication portal between PROFIBUS devices (e.g., PROFIBUS PLC or drive) and the PROFINET host. All models are protected with a rugged metallic casing, are DIN-rail mountable, and offer optional built-in optical

isolation. The PROFIBUS and Ethernet status LED indicators are provided for easy maintenance. The rugged design is suitable for industrial applications such as oil & gas, power, process automation, and factory automation.

Easy Setup Tools

Both the Windows MGate Manager utility and web console support the AutoScan function, which makes configuration and operation easy. AutoScan automatically detects all connected PROFIBUS slave devices and their available I/O modules, allowing you to configure your gateways very quickly, and a data mapping table is provided. Furthermore, one click is all that's needed to export all PROFIBUS I/O modules to a GSDML file to assist in the configuration of the PROFINET controller (e.g., a Siemens PLC).

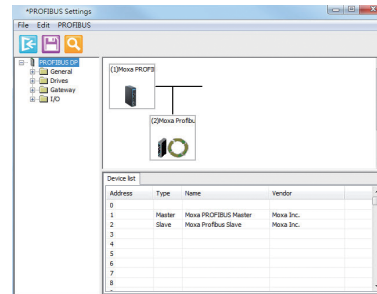

Various Maintenance Functions

The MGate 5102-PBM-PN provides a web console and Telnet console for remote maintenance, with both consoles supporting encryption commutation functions such as HTTPS and SSH to prevent unauthorized access. The status and changes in I/O data of all PROFIBUS slaves can be monitored remotely via the web console,

and users can also review the log from the web console to see which system events have occurred. A relay output alarm is provided for the power input and Ethernet cable status. These functions make it easy for maintenance engineers to troubleshoot and maintain devices.

Redundant Power Inputs

The MGate 5102-PBM-PN has dual power inputs for greater reliability. The power inputs allow simultaneous connections to two live DC power sources to provide uninterrupted operation even if one power

source fails. The higher level of reliability makes these advanced PROFIBUS master to PROFINET gateways ideal for demanding industrial applications.

Specifications

Ethernet Interface

Protocols: PROFINET RT
Number of Ports: 2 (1 IP, Ethernet cascade)
Speed: 10/100 Mbps, Auto MDI/MDIX
Connector: 8-pin RJ45
Magnetic Isolation Protection: 1.5 kV (built-in)

PROFIBUS Interface

Protocol: PROFIBUS DP-V1 Master
Number of Ports: 1
Data Rate: 9600 bps to 12 Mbps
Connector: DB9 female
Isolation: 2 kV (built-in)

Serial Signals (Serial Console)

Connector: 8-pin RJ45

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Software

Configuration Options: Windows Utility, Serial Console, Web Console (HTTP/HTTPS), Telnet/SSH Console

Utility: MGate Manager for Windows 2000, Windows XP, Server 2003, Vista, Server 2008 (x86/x64), Windows Server 2008 R2, Windows 7/8/8.1 (x86/x64), Windows Server 2012 (x64), Windows 2012 R2

Support: AutoScan, MXview, SNMP (v1, v2, v3), Private MIB

Physical Characteristics

Housing: Metal, IP30

Weight: 500 g (1.10 lb)

Dimensions: 36 x 105 x 140 mm (1.42 x 4.14 x 5.51 in)

Storage Card Slot: 1 microSD (SDHC) card slot supports up to 32 GB

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Vibration: IEC 60068-2-6, IEC 60068-2-64

Shock: IEC 60068-2-27

Drop: IEC 60068-2-32

Power Requirements

Input Voltage: 12 to 48 VDC

Input Current: 430 mA @ 12 VDC

Power Connector: Terminal block

Standards and Certifications

Safety: UL 508, EN 60950-1

Hazardous Location: Class 1 Division 2, ATEX, IECEx

EMC: EN 55032/24

EMI: CISPR 32, FCC Part 15B Class B

EMS:

IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV

IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m

IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV

IEC 61000-4-5 Surge: Power: 2 kV

IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m

IEC 61000-4-8 PFMF

MTBF (mean time between failures)

Time: 980,417 hrs


Standard: Telcordia SR332

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

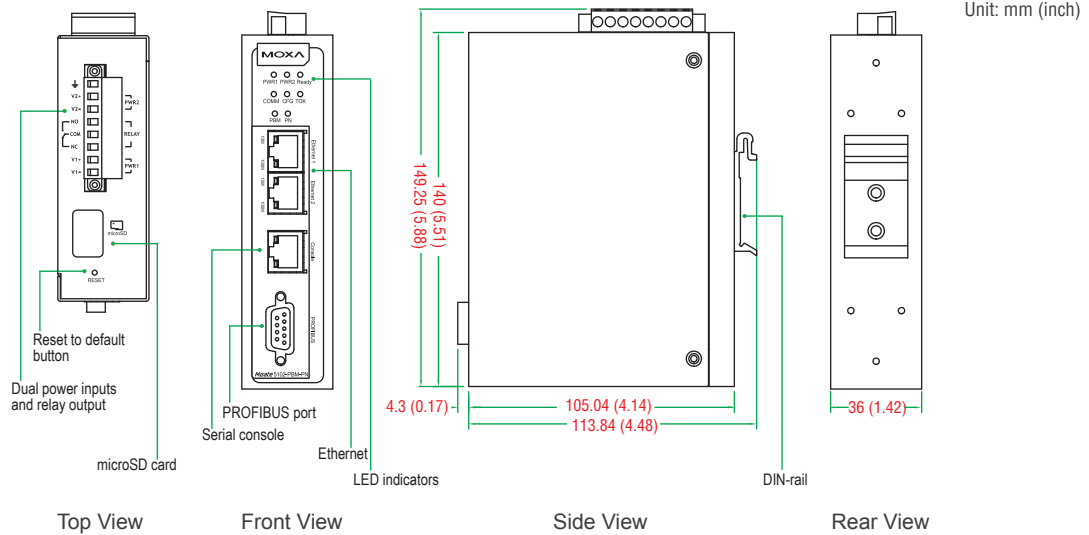

Ordering Information

Available Models

MGate 5102-PBM-PN: 1-port PROFIBUS-to-PROFINET gateway, 12-48 VDC, 0 to 60°C operating temperature

MGate 5102-PBM-PN-T: 1-port PROFIBUS-to-PROFINET gateway, 12-48 VDC, -40 to 75°C operating temperature

Optional Accessories (can be purchased separately)

CBL-F9M9-150: DB9 female to DB9 male serial cable, 150 cm

CBL-F9M9-20: DB9 female to DB9 male serial cable, 20 cm

CBL-RJ45SF9-150: RJ45 to DB9 female shielded serial cable, 150 cm

ADP-RJ458P-DB9F: DB9 female to RJ45 connector

A-ADP-RJ458P-DB9F-ABC01: DB9 female to RJ45 connector

Mini DB9F-to-TB: DB9 female to terminal block connector

Package Checklist

- 1 MGate 5102-PBM-PN PROFIBUS-to-PROFINET gateway
- 1 serial cable: CBL-RJ45F9-150
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card